查询TEA1067N 供应商

LOW VOLTAGE VERSATILE TELEPHONE TRANSMISSION CIRCUIT WITH DIALLER INTERFACE

GENERAL DESCRIPTION

The TEA1067 is a bipolar integrated circuit performing all speech and line interface functions required in fully electronic telephone sets. It performs electronic switching between dialling and speech. The circuit is able to operate down to a DC line voltage of 1.6 V (with reduced performance) to facilitate the use of more telephone sets in parallel.

Features

- Low DC line voltage; operates down to 1.6 V (excluding polarity guard)
- Voltage regulator with adjustable static resistance
- Provides supply with limited current for external circuitry
- Symmetrical high-impedance inputs (64 kΩ) for dynamic, magnetic or piezoelectric microphones
- Asymmetrical high-impedance input (32 kΩ) for electret microphone
- DTMF signal input with confidence tone
- Mute input for pulse or DTMF dialling
- Power down input for pulse dial or register recall
- Receiving amplifier for magnetic, dynamic or piezoelectric earpieces
- Large gain setting range on microphone and earpiece amplifiers
- Line current dependent line loss compensation facility for microphone and earpiece amplifiers
- Gain control adaptable to exchange supply
- DC line voltage adjustment capability

QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Line voltage	I_{line} = 15 mA	V_{LN}	3.65	3.9	4.15	V
Line current operating range	normal operation					
	TEA1067	I_{line}	11	–	140	mA
	TEA1067T	I_{line}	11	–	140	mA
	with reduced performance	I_{line}	1	–	11	mA
Internal supply current	power down					
	input LOW	I_{CC}	–	1	1.35	mA
	input HIGH	I_{CC}	–	55	82	μA
Supply voltage for peripherals	I_{line} = 15 mA; I_p = 1.4 mA; mute input HIGH	V_{CC}	2.2	2.4	–	V
	I_{line} = 15 mA; I_p = 0.9 mA; mute input HIGH	V_{CC}	2.5	–	–	V
Voltage gain range						
microphone amplifier		G_v	44	–	52	dB
receiving amplifier		G_v	20	–	45	dB
Line loss compensation gain control range		ΔG_v	5.5	5.9	6.3	dB
Exchange supply voltage range		V_{exch}	36	–	60	V
Exchange feeding bridge resistance range		R_{exch}	0.4	–	1	kΩ

PACKAGE OUTLINES

TEA1067: 18-lead DIL; plastic (SOT102).
TEA1067T: 20-lead mini-pack; plastic (SO20; SOT163A).

This Material Copyrighted By Its Respective Manufacturer

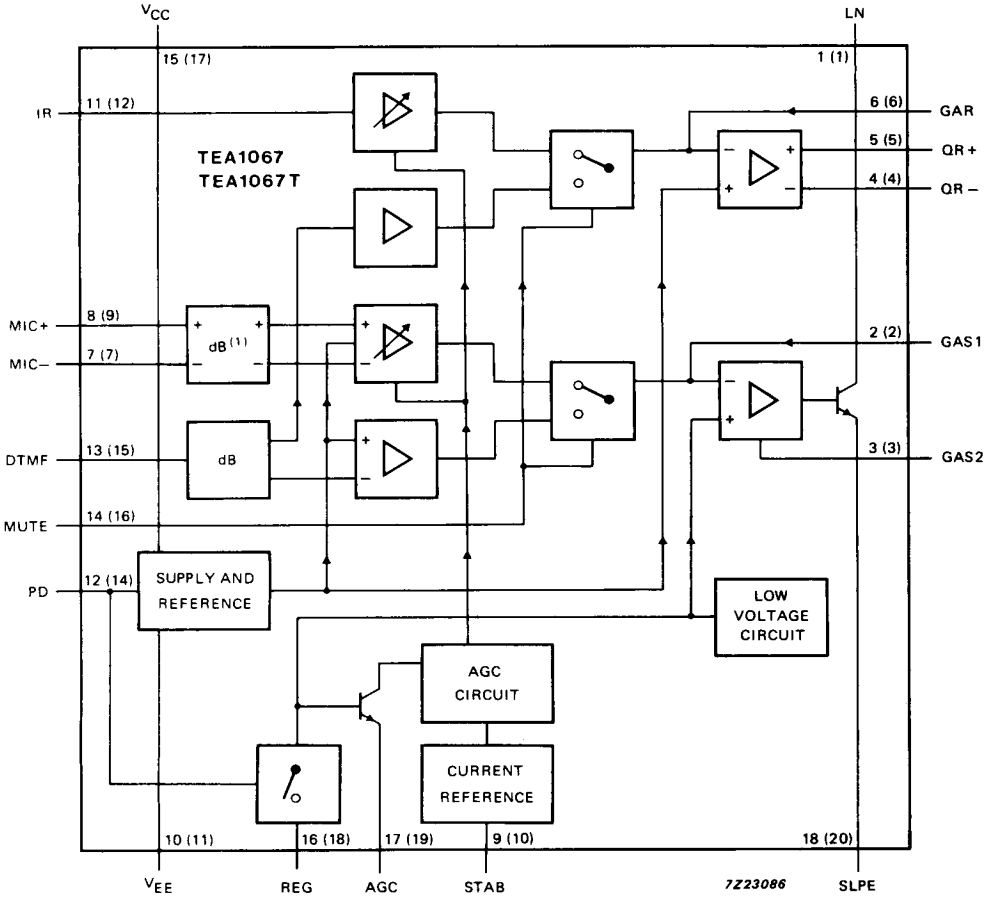

Figures in parenthesis refer to TEA1067T.

Fig. 1 Block diagram.

This Material Copyrighted By Its Respective Manufacturer

PINNING

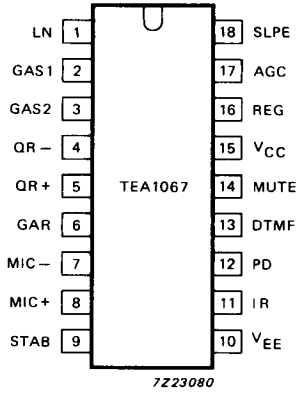

Fig. 2 (a) Pinning diagram for TEA1067 18-lead DIL version.

1	LN	positive line terminal
2	GAS1	gain adjustment; transmitting amplifier
3	GAS2	gain adjustment; transmitting amplifier
4	QR–	inverting output; receiving amplifier
5	QR+	non-inverting output receiving amplifier
6	GAR	gain adjustment; receiving amplifier
7	MIC–	inverting microphone input
8	MIC+	non-inverting microphone input
9	STAB	current stabilizer
10	V_{EE}	negative line terminal
11	IR	receiving amplifier input
12	PD	power-down input
13	DTMF	dual-tone multi-frequency input
14	MUTE	mute input
15	V_{CC}	positive supply decoupling
16	REG	voltage regulator decoupling
17	AGC	automatic gain control input
18	SLPE	slope (DC resistance) adjustment

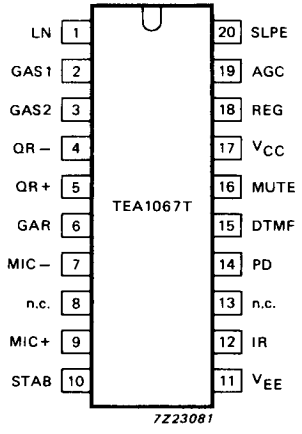

Fig. 2 (b) Pinning diagram for TEA1067T 20-lead mini-pack version.

1	LN	positive line terminal
2	GAS1	gain adjustment; transmitting amplifier
3	GAS2	gain adjustment; transmitting amplifier
4	QR–	inverting output; receiving amplifier
5	QR+	non-inverting output receiving amplifier
6	GAR	gain adjustment, receiving amplifier
7	MIC–	inverting microphone input
8	n.c.	not connected
9	MIC+	non-inverting microphone input
10	STAB	current stabilizer
11	V_{EE}	negative line terminal
12	IR	receiving amplifier input
13	n.c.	not connected
14	PD	power-down input
15	DTMF	dual-tone multi-frequency input
16	MUTE	mute input
17	V_{CC}	positive supply decoupling
18	REG	voltage regulator decoupling
19	AGC	automatic gain control input
20	SLPE	slope (DC resistance) adjustment

This Material Copyrighted By Its Respective Manufacturer

FUNCTIONAL DESCRIPTION

Supply: V_{CC}, LN, SLPE, REG and STAB

Power for the TEA1067 and its peripheral circuits is usually obtained from the telephone line. The IC develops its own supply at V_{CC} and regulates its voltage drop. The supply voltage V_{CC} may also be used to supply external circuits e.g. dialling and control circuits.

Decoupling of the supply voltage is performed by a capacitor between V_{CC} and V_{EE} while the internal voltage regulator is decoupled by a capacitor between REG and V_{EE}.

The DC current drawn by the device will vary in accordance with varying values of the exchange voltage (V_{exch}), the feeding bridge resistance, (R_{exch}) and the DC resistance of the telephone line (R_{line}).

The TEA1067 has an internal current stabilizer working at a level determined by a 3.6 kΩ resistor connected between STAB and V_{EE} (see Fig. 6). When the line current (I_{line}) is more than 0.5 mA greater than the sum of the IC supply current (I_{CC}) and the current drawn by the peripheral circuitry connected to V_{CC} (I_p) the excess current is shunted to V_{EE} via LN.
The regulated voltage on the line terminal (V_{LN}) can be calculated as:

$$V_{LN} = V_{ref} + I_{SLPE} \times R9; \text{ or } V_{LN} = V_{ref} + [(I_{line} - I_{CC} - 0.5 \times 10^{-3}\,A) - I_p] \times R9$$

Where V_{ref} is an internally generated temperature compensated reference voltage of 3.6 V and R9 is an external resistor connected between SLPE and V_{EE}. In normal use the value of R9 would be 20 Ω. Changing the value of R9 will also affect microphone gain, DTMF gain, gain control characteristics, side-tone level and maximum output swing on LN, and the DC characteristics (especially at the lower voltages).

Under normal conditions, when $I_{SLPE} \gg I_{CC} + 0.5\text{ mA} + I_p$, the static behaviour of the circuit is that of a 3.6 V regulator diode with an internal resistance equal to that of R9. In the audio frequency range the dynamic impedance is largely determined by R1. Fig. 3 shows the equivalent impedance of the circuit.

At line currents below 9 mA the internal reference voltage is automatically adjusted to a lower value (typically 1.6 V at 1 mA). This means that the operation of more sets in parallel is possible with DC line voltages (excluding the polarity guard) down to an absolute minimum voltage of 1.6 V. With line currents below 9 mA the circuit has limited sending and receiving levels. The internal reference voltage can be adjusted by means of an external resistor (R_{VA}). This resistor connected between LN and REG will decrease the internal reference voltage, connected between REG and SLPE it will increase the internal reference voltage.

Current (I_p) available from V_{CC} for peripheral circuits depends on the external components used. Fig. 9 shows this current for $V_{CC} > 2.2$ V. If MUTE is LOW when the receiving amplifier is driven the available current is further reduced. Current availability can be increased by connecting the supply IC (TEA1081) in parallel with R1, as shown in Fig. 16 (c), or by increasing the DC line voltage by means of an external resistor (R_{VA}) connected between REG and SLPE.

This Material Copyrighted By Its Respective Manufacturer

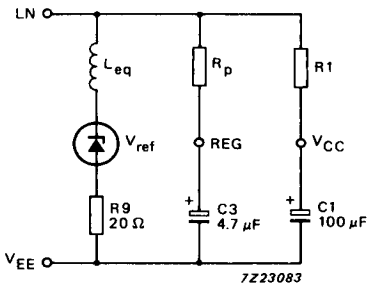

$R_p = 16.2\ k\Omega$
$L_{eq} = C3 \times R9 \times R_p$

Fig. 3 Equivalent impedance circuit.

Microphone inputs (MIC+ and MIC−) and gain adjustment pins (GAS1 and GAS2)

The TEA1067 has symmetrical microphone inputs. Its input impedance is 64 kΩ (2 x 32 kΩ) and its voltage gain is typically 52 dB (when R7 = 68 kΩ, see Fig. 13). Dynamic, magnetic, piezoelectric or electret (with built-in FET source followers) microphones can be used. Microphone arrangements are shown in Fig. 10.

The gain of the microphone amplifier can be adjusted between 44 dB and 52 dB to suit the sensitivity of the transducer in use. The gain is proportional to the value of R7 which is connected between GAS1 and GAS2. Stability is ensured by the external capacitor C6 which is connected between GAS1 and SLPE. The value of C6 is 100 pF but this may be increased to obtain a first-order low-pass filter. The cut-off frequency corresponds to the time constant R7 x C6.

Mute input (MUTE)

When MUTE is HIGH the DTMF input is enabled and the microphone and receiving amplifier inputs are inhibited. The reverse is true when MUTE is LOW or open-circuit. MUTE switching causes only negligible clicking on the earpiece outputs and line. If the number of parallel sets in use causes a drop in line current to below 6 mA the speech amplifiers remain active independent to the DC level applied to the MUTE input.

Dual-tone multi-frequency input (DTMF)

When the DTMF input is enabled dialling tones may be sent onto the line. The voltage gain from DTMF to LN is typically 25.5 dB (when R7 = 68 kΩ) and varies with R7 in the same way as the microphone gain. The signalling tones can be heard in the earpiece at a low level (confidence tone).

Receiving Amplifier (IR, QR+, QR− and GAR)

The receiving amplifier has one input (IR), one non-inverting complementary output (QR+) and an inverting complementary output (QR−). These outputs may be used for single-ended or differential drive depending on the sensitivity and type of earpiece used (see Fig. 11). IR to QR + gain is typically 31 dB (when R4 = 100 kΩ), this is sufficient for low-impedance magnetic or dynamic microphones which are suited for single-ended drive. Using both outputs for differential drive gives an additional gain of 6 dB. This feature can be used when the earpiece impedance exceeds 450 Ω (high-impedance dynamic or piezoelectric types).

This Material Copyrighted By Its Respective Manufacturer

FUNCTIONAL DESCRIPTION (continued)

Receiving Amplifier (IR, QR+, QR− and GAR) (continued)

The receiving amplifier gain can be adjusted between 20 and 39 dB with single-ended drive and between 26 and 45 dB with differential drive, to match the sensitivity of the transducer in use. The gain is set with the value of R4 which is connected between GAR and QR+. Overall receive gain between LN and QR+ is calculated by substracting the anti-sidetone network attenuation (32 dB) from the amplifier gain. Two external capacitors C4 and C7, ensure stability. C4 is normally 100 pF and C7 is 10 x the value of C4. The value of C4 may be increased to obtain a first-order low-pass filter. The cut-off frequency will depend on the time constant R4 x C4.
The output voltage of the receiving amplifier is specified for continuous-wave drive. The maximum output voltage will be higher under speech conditions where the peak to RMS ratio is higher.

Automatic gain control input (AGC)

Automatic line loss compensation is achieved by connecting a resistor (R6) between AGC and V_{EE}. The automatic gain control varies the gain of the microphone amplifier and the receiving amplifier in accordance with the DC line current. The control range is 5.9 dB. This corresponds to a line length of 5 km for a 0.5 mm diameter copper twisted-pair cable with a DC resistance of 176 Ω/km and an average attenuation 1.2 dB/km. Resistor R6 should be chosen in accordance with the exchange supply voltage and its feeding bridge resistance (see Fig. 12 and Table 1). The ratio of start and stop currents of the AGC curve is independent of the value of R6. If no automatic line loss compensation is required the AGC may be left open-circuit. The amplifiers, in this condition, will give their maximum specified gain.

Power-down input (PD)

During pulse dialling or register recall (timed loop break) the telephone line is interrupted. During these interruptions the telephone line provides no power for the transmission circuit or circuits supplied by V_{CC}. The charge held on C1 will bridge these gaps. This bridging is made easier by a HIGH level on the PD input which reduces the typical supply current from 1 mA to 55 μA and switches off the voltage regulator preventing discharge through LN. When PD is HIGH the capacitor at REG is disconnected with the effect that the voltage stabilizer will have no switch-on delay after line interruptions. This minimizes the contribution of the IC to the current waveform during pulse dialling or register recall. When this facility is not required PD may be left open-circuit.

Side-tone suppression

The anti-sidetone network, $R1//Z_{line}$, R2, R3, R9 and Z_{bal}, (see Fig. 4) suppresses transmitted signal in the earpiece. Compensation is maximum when the following conditions are fulfilled:

(a) $R9 \times R2 = R1\ (R3 + [R8//Z_{bal}])$;

(b) $(Z_{bal}/[Z_{bal} + R8]) = (Z_{line}/[Z_{line} + R1])$

If fixed values are chosen for R1, R2, R3, and R9 then condition (a) will always be fulfilled when $|R8//Z_{bal}| \ll R3$. To obtain optimum side-tone suppression condition (b) has to be fulfilled resulting in:

$Z_{bal} = (R8/R1)\ Z_{line} = k.Z_{line}$ where k is a scale factor; $k = (R8/R1)$

The scale factor (k), dependent on the value of R8, is chosen to meet the following criteria:

(a) Compatability with a standard capacitor from the E6 or E12 range for Z_{bal}

(b) $|Z_{bal}//R8| \ll R3$ to fulfill condition (a) and thus ensuring correct anti-sidetone bridge operation

(c) $|Z_{bal} + R8| \gg R9$ to avoid influencing the transmitter gain

In practice Z_{line} varies considerably with the line type and length. The value chosen for Z_{bal} should therefore be for an average line length thus giving optimum setting for short or long lines.

This Material Copyrighted By Its Respective Manufacturer

Example

The line balance impedance (Z_{bal}) at which the optimum suppression is present can be calculated by: suppose Z_{line} = 210 Ω + (1265 Ω/140 nF), representing a 5 km line of 0.5 mm diameter, copper, twisted-pair cable matched to 600 Ω (176 Ω/km; 38 nF/km).
When k = 0.64 then R8 = 390 Ω; Z_{bal} = 130 Ω + (820 Ω//220 nF).

The anti-sidetone network for the TEA1060 family shown in Fig. 4 attenuates the signal received from the line by 32 dB before it enters the receiving amplifier. The attenuation is almost constant over the whole audio frequency range. Fig. 5 shows a conventional Wheatstone bridge anti-sidetone circuit that can be used as an alternative. Both bridge types can be used with either resistive or complex set impedances.

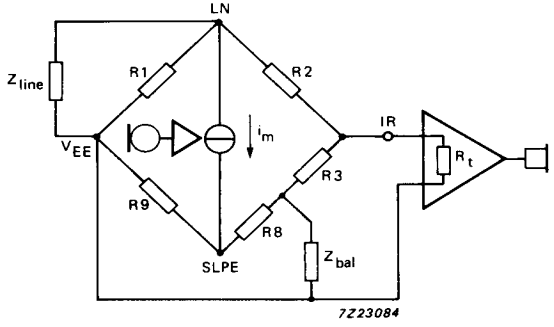

Fig. 4 Equivalent circuit of TEA1060 anti-sidetone bridge.

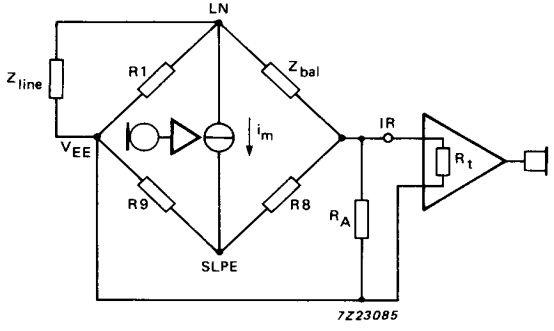

Fig. 5 Equivalent circuit of an anti-sidetone network in a Wheatstone bridge configuration.

More information can be found in the designer guide; 9398 341 10011

This Material Copyrighted By Its Respective Manufacturer

RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Positive continuous line voltage		V_{LN}	–	12	V
Repetitive line voltage during switch-on line interruption		V_{LN}	–	13.2	V
Repetitive peak line voltage for a 1 ms pulse per 5 s	R9 = 20 Ω; R10 = 13 Ω (Fig. 15)	V_{LN}	–	28	V
Line current TEA1067(1)	R9 = 20 Ω	I_{line}	–	140	mA
Line current TEA1067T (1)	R9 = 20 Ω	I_{line}	–	140	mA
Voltage on all other pins		V_i	–	V_{CC} + 0.7	V
		$-V_i$	–	0.7	V
Total power dissipation (2)	R9 = 20 Ω				
TEA1067		P_{tot}	–	769	mW
TEA1067T		P_{tot}	–	550	mW
Storage temperature range		T_{stg}	−40	+ 125	°C
Operating ambient temperature range		T_{amb}	−25	+ 75	°C
Junction temperature		T_j	–	+ 125	°C

(1) Mostly dependent on the maximum required T_{amb} and on the voltage between LN and SLPE. See Figs 6 and 7 to determine the current as a function of the required voltage and the temperature.

(2) Calculated for the maximum ambient temperature specified T_{amb} = 75 °C and a maximum junction temperature of 125 °C.

THERMAL RESISTANCE

From junction to ambient in free air

TEA1067	$R_{th\ j\text{-}a}$	typ.	65	K/W
TEA1067T mounted on glass epoxy board 41 x 19 x 1.5 mm	$R_{th\ j\text{-}a}$	typ.	90	K/W

This Material Copyrighted By Its Respective Manufacturer

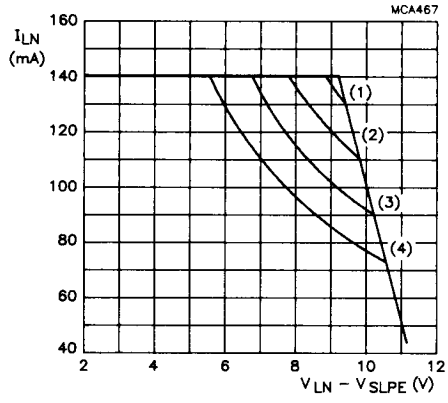

	T_{amb}	P_{tot}
(1)	45 °C	1231 mW
(2)	55 °C	1077 mW
(3)	65 °C	923 mW
(4)	75 °C	769 mW

Fig. 6 TEA1067 safe operating area.

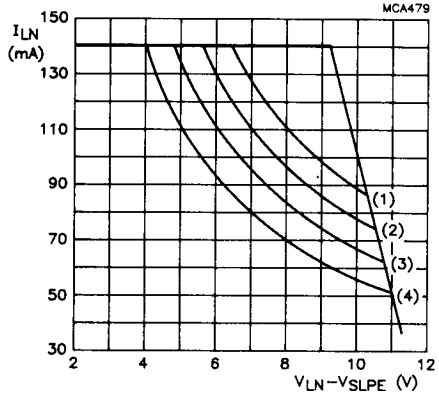

	T_{amb}	P_{tot}
(1)	45 °C	888 mW
(2)	55 °C	777 mW
(3)	65 °C	666 mW
(4)	75 °C	555 mW

Fig. 7 TEA1067T safe operating area.

This Material Copyrighted By Its Respective Manufacturer

CHARACTERISTICS

I_{line} = 11 to 140 mA; V_{EE} = 0 V; f = 800 Hz; T_{amb} = 25 °C; unless otherwise specified

parameter	condition	symbol	min.	typ.	max.	unit
Supply; LN and V_{CC}						
Voltage drop over circuit, between LN and V_{EE}	microphone inputs open					
	I_{line} = 1 mA	V_{LN}	–	1.6	–	V
	I_{line} = 4 mA	V_{LN}	1.75	2.0	2.25	V
	I_{line} = 7 mA	V_{LN}	2.25	2.8	3.35	V
	I_{line} = 11 mA	V_{LN}	3.55	3.8	4.05	V
	I_{line} = 15 mA	V_{LN}	3.65	3.9	4.15	V
	I_{line} = 100 mA	V_{LN}	4.9	5.6	6.5	V
	I_{line} = 140 mA	V_{LN}	–	–	7.5	V
Variation with temperature	I_{line} = 15 mA	$\Delta V_{LN}/\Delta T$	−3	−1	1	mV/K
Voltage drop over circuit, between LN and V_{EE} with external resistor R_{VA}	I_{line} = 15 mA; R_{VA} (LN to REG) = 68 kΩ		3.1	3.4	3.7	V
	I_{line} = 15 mA; R_{VA} (REG to SLPE) = 39 kΩ		4.2	4.5	4.8	V
Supply current	PD = LOW; V_{CC} = 2.8 V	I_{CC}	–	1.0	1.35	mA
Supply current	PD = HIGH; V_{CC} = 2.8 V	I_{CC}	–	55	82	μA
Supply voltage available for peripheral circuitry	I_{line} = 15 mA; MUTE = HIGH					
	I_p = 1.4 mA	V_{CC}	2.2	2.4	–	V
	I_p = 0 mA	V_{CC}	2.95	3.2	–	V
Microphone inputs MIC+ and MIC−						
Input impedance (differential) between MIC− and MIC+		$\|Z_i\|$	51	64	77	kΩ
Input impedance (single-ended) MIC− or MIC+ to V_{EE}		$\|Z_i\|$	25.5	32	38.5	kΩ
Common mode rejection ratio		k_{CMR}	–	82	–	dB
Voltage gain MIC+/MIC− to LN	I_{line} = 15 mA; R7 = 68 kΩ	G_v	51	52	53	dB

This Material Copyrighted By Its Respective Manufacturer

parameter	conditions	symbol	min.	typ.	max.	unit
Microphone inputs MIC+ and MIC− (continued)						
Gain variation with frequency at f = 300 Hz and f = 3400 Hz	w.r.t. 800 Hz	ΔG_{vf}	−0.5	± 0.2	+0.5	dB
Gain variation with temperature at −25 °C and +75 °C	w.r.t. 25 °C without R6; I_{line} = 50 mA	ΔG_{vT}	–	± 0.2	–	dB
Dual-tone multi-frequency input DTMF						
Input impedance		$\lvert Z_i \rvert$	16.8	20.7	24.6	kΩ
Voltage gain from DTMF to LN	I_{line} = 15 mA; R7 = 68 kΩ	G_v	24.5	25.5	26.5	dB
Gain variation with frequency at f = 300 Hz and f = 3400 Hz	w.r.t 800 Hz	ΔG_{vf}	−0.5	±0.2	+0.5	dB
Gain variation with temperature at −25 °C and +75 °C	w.r.t. 25 °C I_{line} = 50 mA	ΔG_{vT}	–	±0.2	–	dB
Gain adjustment GAS1 and GAS2						
Gain variation of the transmitting amplifier by varying R7 between GAS1 and GAS2		ΔG_v	−8	–	0	dB
Sending amplifier output LN						
Output voltage	I_{line} = 15 mA					
	THD = 2%	$V_{LN(rms)}$	–	1.9	–	V
	THD = 10%	$V_{LN(rms)}$	1.9	2.2	–	V
	I_{line} = 4 mA; THD = 10%	$V_{LN(rms)}$	–	0.8	–	V
	I_{line} = 7 mA; THD = 10%	$V_{LN(rms)}$	–	1.4	–	V
Noise output voltage	I_{line} = 15 mA; R7 = 68 kΩ; 200 Ω between MIC− and MIC+; psophometrically weighted (P53 curve)	$V_{no(rms)}$	–	−72	–	dBmp

This Material Copyrighted By Its Respective Manufacturer

CHARACTERISTICS (continued)

parameter	conditions	symbol	min.	typ.	max.	unit
Receiving amplifier input IR						
Input impedance		$\|Z_i\|$	17	21	25	kΩ
Receiving amplifier outputs QR+ and QR−						
Output impedance (single-ended)		$\|Z_o\|$	–	4	–	Ω
Voltage gain from IR to QR+ or QR−	I_{line} = 15 mA; R4 = 100 kΩ					
single-ended	R_L (from QR+ or QR−) = 300 Ω	G_v	30	31	32	dB
differential	R_L (from QR+ or QR−) = 600 Ω	G_v	36	37	38	dB
Gain variation with frequency at f = 300 Hz and f = 3400 Hz	w.r.t. 800 Hz	ΔG_{vf}	−0.5	−0.2	0	dB
Gain variation with temperature at −25 °C and +75 °C	w.r.t. 25 °C without R6; I_{line} = 50 mA	ΔG_{vT}	–	±0.2	–	dB
Output voltage	sinewave drive I_{line} = 15 mA; I_p = 0 mA; THD = 2% R4 = 100 kΩ					
single-ended	RL = 150 Ω	$V_{o(rms)}$	0.25	0.29	–	V
	RL = 450 Ω	$V_{o(rms)}$	0.45	0.55	–	V
differential	f = 3400 Hz; series R = 100 Ω; C_L = 47 nF	$V_{o(rms)}$	0.65	0.80	–	V
Output voltage	THD = 10%; RL = 150 Ω R4 = 100 kΩ					
	I_{line} = 4 mA	$V_{o(rms)}$	–	15	–	mV
	I_{line} = 7 mA	$V_{o(rms)}$	–	130	–	mV
Noise output voltage	I_{line} = 15 mA; R4 = 100 kΩ; IR open-circuit psophometrically weighted; (P53 curve)					
single-ended	RL = 300 Ω	$V_{no(rms)}$	–	50	–	μV
differential	RL = 600 Ω	$V_{no(rms)}$	–	100	–	μV

This Material Copyrighted By Its Respective Manufacturer

parameter	conditions	symbol	min.	typ.	max.	unit
Gain adjustment GAR						
Gain variation of receiving amplifier achievable by varying R4 between GAR and QR		ΔG_v	−11	–	+8	dB
Mute input						
Input voltage HIGH		V_{IH}	1.5	–	V_{CC}	V
Input voltage LOW		V_{IL}	–	–	0.3	V
Input current		I_{MUTE}	–	8	15	μA
Gain reduction MIC+ or MIC− to LN	MUTE = HIGH	ΔG_v	–	70	–	dB
Voltage gain from DTMF to QR+ or QR−	MUTE = HIGH; R4 = 100 kΩ; single-ended; R_L = 300 Ω	G_v	−21	−19	−17	dB
Power-down input PD						
Input voltage HIGH		V_{IH}	1.5	–	V_{CC}	V
Input voltage LOW		V_{IL}	–	–	0.3	V
Input current		I_{PD}	–	5	10	μA
Automatic gain control input AGC Controlling the gain from IR to QR+/QR− and the gain from MIC+/MIC− to LN; R6 between AGC and V_{EE}	R6 = 110 kΩ					
Gain control range	I_{line} = 70 mA	ΔG_v	−5.5	−5.9	−6.3	dB
Highest line current for maximum gain		I_{line}	–	23	–	mA
Minimum line current for minimum gain		I_{line}	–	61	–	mA
Reduction of gain between I_{line} = 15 mA and I_{line} = 35 mA		ΔG_v	−1.0	−1.5	−2.0	dB

This Material Copyrighted By Its Respective Manufacturer

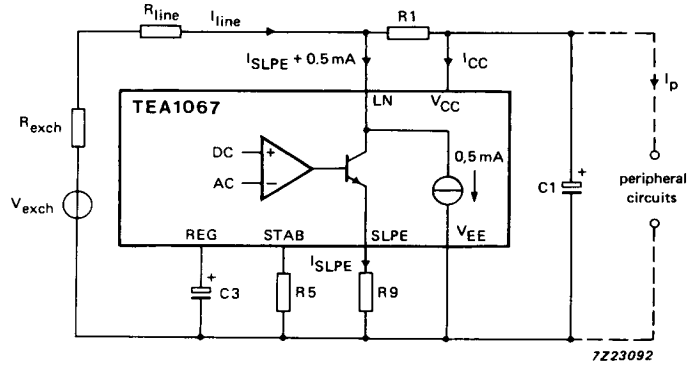

Fig. 8 Supply arrangement.

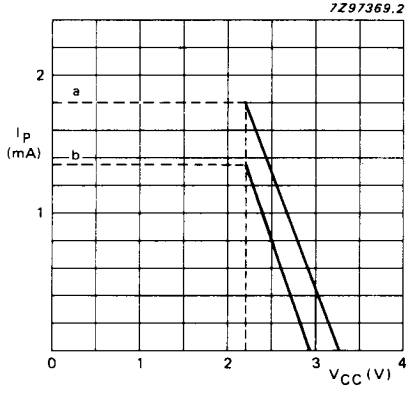

(a) I_p = 1.8 mA
(b) I_p = 1.35 mA
I_{line} = 15 mA at V_{LN} = 3.9 V
R1 = 620 Ω and R9 = 20 Ω.

Fig. 9 Typical current I_p available from V_{CC} for peripheral circuitry with $V_{CC} >= 2.2$ V. Curve (a) is valid when the receiving amplifier is not driven or when MUTE = HIGH, curve (b) is valid when MUTE = LOW and the receiving amplifier is driven; $V_{o(rms)}$ = 150 mV, R_L = 150 Ω asymmetrical.
The supply possibilities can be increased simply by setting the voltage drop over the circuit V_{LN} to a higher value by means of resistor R_{VA} connected between REG and SLPE.

This Material Copyrighted By Its Respective Manufacturer

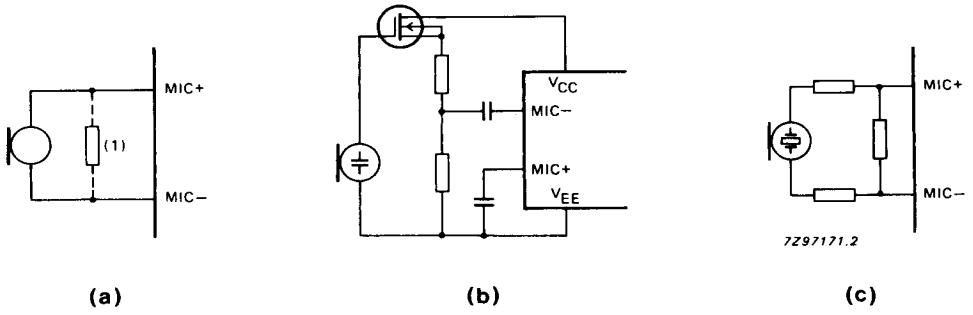

Fig. 10 Alternative microphone arrangements.

(a) Magnetic or dynamic microphone. The resistor marked (1) may be connected to decrease the terminating impedance.
(b) Electret microphone.
(c) Piezoelectric microphone.

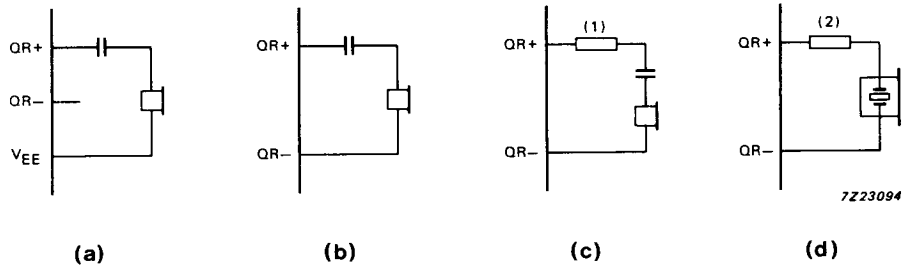

Fig. 11 Alternative receiver arrangements.

(a) Dynamic earpiece with less than 450 Ω impedance.
(b) Dynamic earpiece with more than 450 Ω impedance.
(c) Magnetic earpiece with more than 450 Ω impedance. The resistor marked (1) may be connected to prevent distortion (inductive load).
(d) Piezoelectric earpiece. The resistor marked (2) is required to increase the phase margin (capacitive load).

This Material Copyrighted By Its Respective Manufacturer

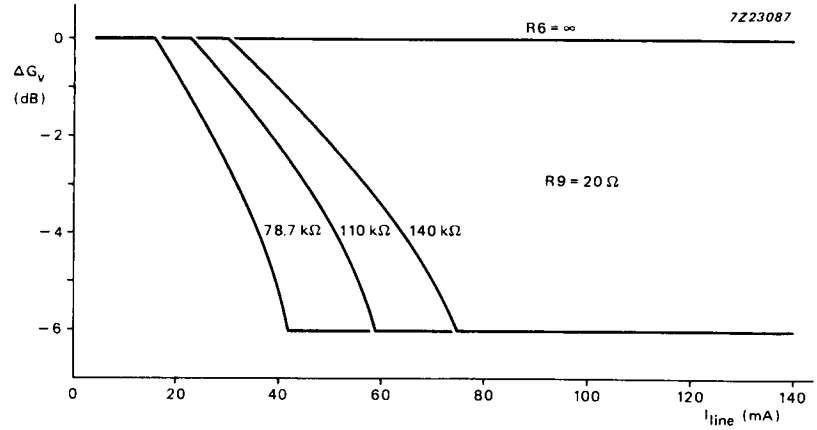

Fig. 12 Variation of gain with line current, with R6 as a parameter.

Table 1 Values of resistor R6 for optimum line loss compensation, for various usual values of exchange supply voltage (V_{exch}) and exchange feeding bridge resistance (R_{exch}); R9 = 20 Ω.

		R_{exch} (Ω)			
		400	600	800	1000
		R6 (kΩ)			
V_{exch} (V)	36	100	78.7	X	X
	48	140	110	93.1	82
	60	X	X	120	102

This Material Copyrighted By Its Respective Manufacturer

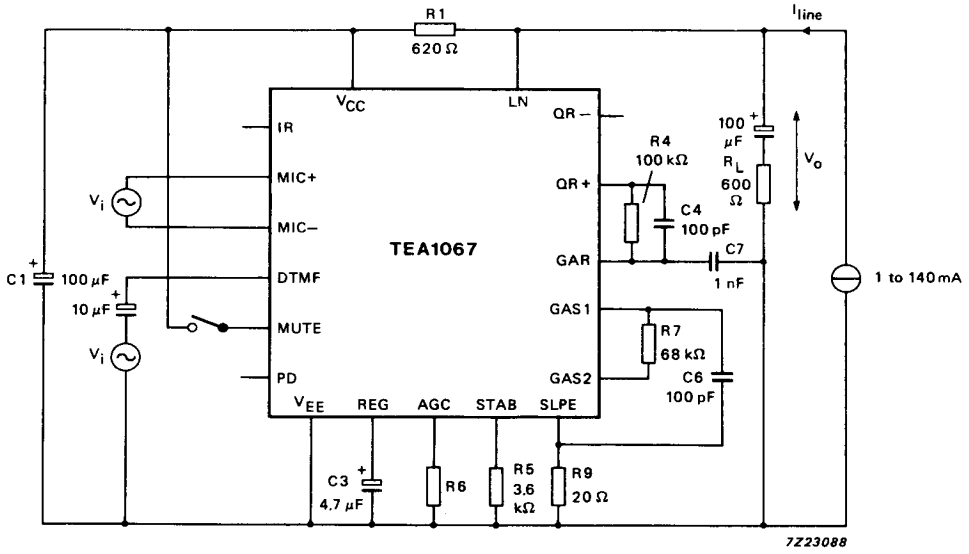

Fig. 13 Test circuit for defining voltage gain of MIC+, MIC– and DTMF inputs. Voltage gain is defined as; $G_v = 20 \log |V_o/V_i|$. For measuring the gain from MIC+ and MIC– the MUTE input should be LOW or open, for measuring the DTMF input MUTE should be HIGH. Inputs not under test should be open.

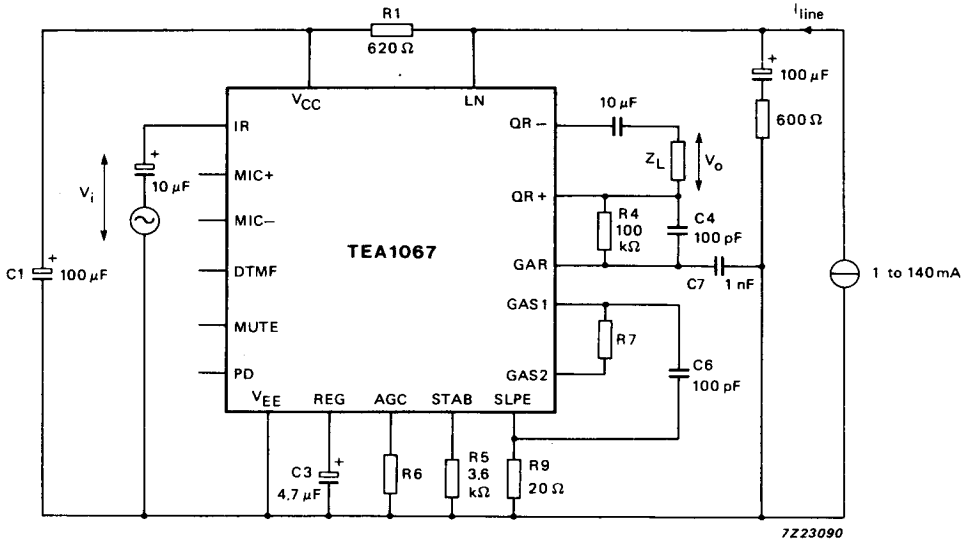

Fig. 14 Test circuit for defining voltage gain of the receiving amplifier. Voltage gain is defined as; $G_v = 20 \log |V_o/V_i|$.

This Material Copyrighted By Its Respective Manufacturer

APPLICATION INFORMATION

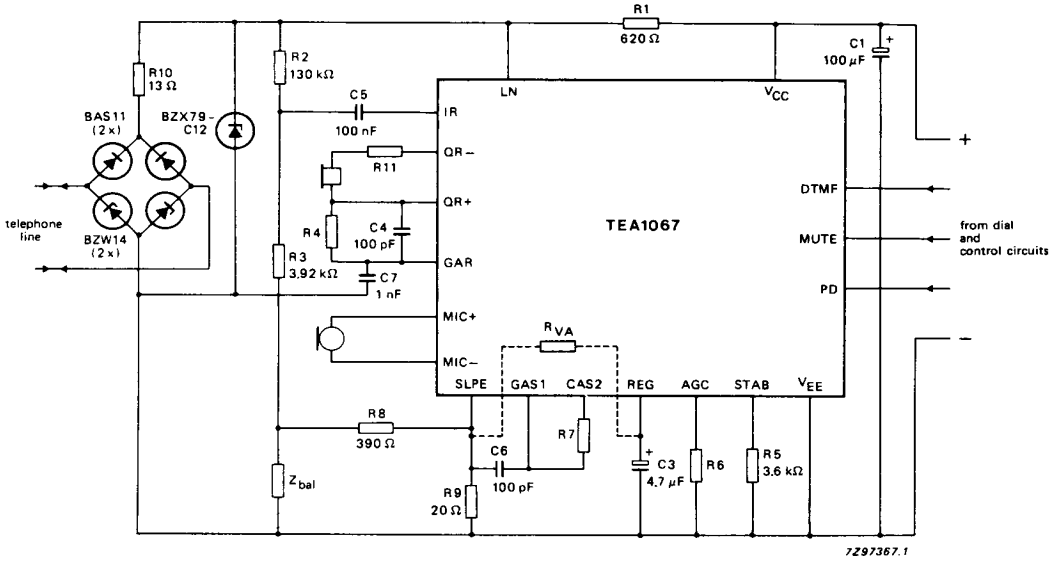

Fig. 15 Typical application of the TEA1067, shown here with a piezoelectric earpiece and DTMF dialling. The bridge to the left, the zener diode and R10 limit the current into the circuit and the voltage across the circuit during line transients. Pulse dialling or register recall require a different protection arrangement.
The DC line voltage can be set to a higher value by the resistor R_{VA} (REG to SLPE).

This Material Copyrighted By Its Respective Manufacturer

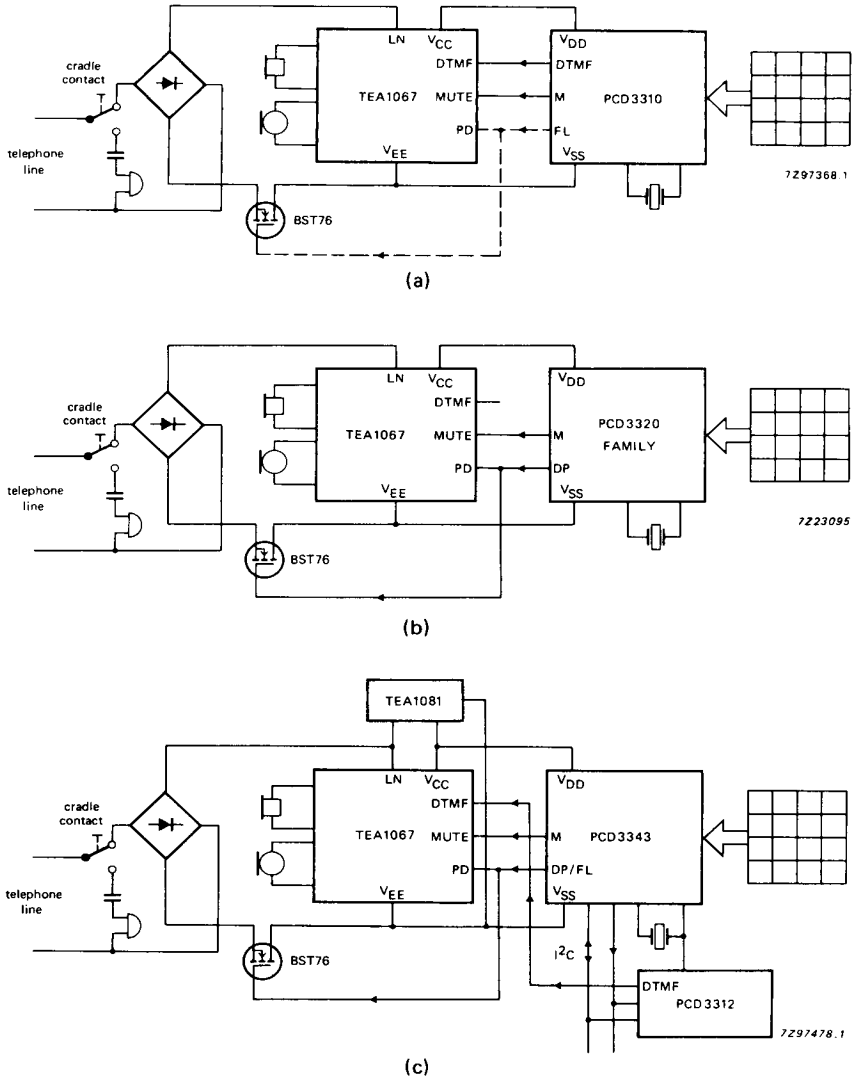

Fig. 16 Typical applications of the TEA1067 (simplified).

(a) DTMF-Pulse set with CMOS dialling circuit PCD3310.
The dashed lines show an optional flash (register recall by timed loop break).
(b) Pulse dial set with one of the PCD3320 family of CMOS interrupted current-loop dialling circuits.
(c) Dual-standard (pulse and DTMF) feature phone with the PCD3343 CMOS controller and the PCD3312 CMOS DTMF generator with I^2C-bus. Supply is provided by the TEA1081 supply circuit.

This Material Copyrighted By Its Respective Manufacturer